

A.39 Recessed - Structural Module Trimless 1184mm 4000K DALI


Carlotta de Bevilacqua

DESCRIPTION

Optimized version in line applications with wide lengths. Diffusing direct and direct + indirect emission. Recessed trim, trimless, suspension and ceiling versions. Dimmable and non dimmable in two CCT 3000K and 4000K versions.



IP20  Dimmable: 

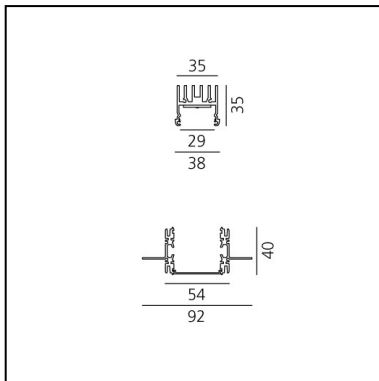

LUMINAIRE

- Watt: **33W**
- Flux Lumineux (lm): **2070lm**
- CCT: **4000K**
- Efficiency: **43%**
- Efficacy: **62.72lm/W**
- CRI: **80**
- Dimmable Typology: **Dali**

Remarques

Opal diffuser supplied separately.
APP interface supplied separately.
The APP driver can not be controlled dimming system and viceversa.

CODE PRODUIT: AT00200

CARACTÉRISTIQUES

- Code Article : **AT00200**
- Couleur: **Aluminium**
- Installation: **Encastré**
- Séries: **Architectural Indoor**
- Environnement: **Indoor**
- Emission: **Direct**
- dessiné par: **Carlotta de Bevilacqua**

DIMENSIONS

- Longueur : **cm 118**

SOURCES INCLUES

- Catégorie: **Led**
- Nombre: **1**
- Watt: **33W**
- Température de Couleur (K): **4000K**
- Color Tolerance: **MacAdam 2SDCM**
- Service Life: **L70 (6K) 50000h**

ACCESSOIRES



Remote BLL interface for Artemide App to manage dimmable ceiling modules (up to 40 addresses) DV1054APP

NO
IMAGE
AVAILABLE

A.39 - Opal Diffuser in Polycarbonate - L=1184mm
AT10100

NO
IMAGE
AVAILABLE

A.39 - Opal Diffuser in Polycarbonate -
L=10000mm AT10000

NO
IMAGE
AVAILABLE

A.39 - Opal Diffuser in Polycarbonate - L=2368mm
AT10200

NO
IMAGE
AVAILABLE

A.39 - Opal Diffuser in Polycarbonate -
L=25000mm AT10800

NO
IMAGE
AVAILABLE

A.39 - Opal Diffuser in Polycarbonate - L=50000mm
AT10900

NO
IMAGE
AVAILABLE

A.39 - Opal Diffuser in Polycarbonate -
L=2960mm AT10300